

THE FUTURE OF CLOUD-ENABLED PHYSICAL PAYMENTS

CLOUDICS FLOW & PAY

Always connected Outdoor Payment Terminal designed for the next generation multi-energy hubs and charging locations.



Universal connectivity

Built for the modern energy ecosystem, the eOPT integrates seamlessly with various backend solutions via **OCPI (Open Charge Point Interface)** or proprietary APIs. This ensures your payment solution remains platform-agnostic and fully interoperable.

Our solution is designed for **streamlined deployment process** and engineered for **easy installation**. eOPT architecture allows you to scale efficiently by connecting multiple energies – chargers and pumps; and managing separate payment flows from a single, compact terminal.

SEAMLESS USER EXPERIENCE



Instant access

No registration required. Users can pay instantly using Visa, Mastercard, or mobile/QR-methods like Apple Pay and Google Pay




Digital convenience

Post-service, digital receipts and invoices are delivered instantly to smartphones via QR-code.



Scandinavian reliability

Housed in a stylish, vandal-proof stainless steel body with LED lighting, it is designed for 24/7 unmanned operations in Nordic conditions.



Plug & Play architecture

Take full control of the customer journey with an interface that adapts to your logic. You can combine **various services** into one user experience.

eOPT is for more than just charging or fuelling. Cloudics offers a **multi-use hub** where customers can pay for all energy types, car washes, and parking through a single interface.



Customisable business flows



Multi-service management



PRODUCT SPECIFICATIONS

The simplest, most secure solutions for electronic payments directly at the location



Connect 10 or more chargers




Front opening and maintenance



Optional 7" touchscreen with vandal-proof glass



Digital receipts or invoices via QR

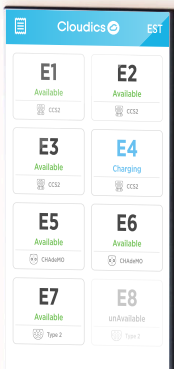

cloudics

Mounting

Ground, single side, double side

Screen

3.26" color QVGA (240x320)

Display

Optional extra 7" capacitive touch screen

Card reader

Hybrid card reader (Chip, MagStrip, CTLSS)

Network

Ethernet 10/100, 1 x RJ45 LAN port

Power

230V AC

Connectors

Up to 16 connectors

Temperature

-25 C to +70 C

Certifications

PCI PTS 5.1 certified, PIN on glass certified

Dimensions

200x162x1461 mm (cover 230x225 mm)

Weight

20 kg

Material

Stainless steel

CONTACT US FOR MORE INFORMATION

info@cloudics.com

+372 628 0000

cloudics.com

Cloudics